

Halogen reflector

14527 150W GX5.3 21V 1CT

Quartz halogen lamps with integral reflector which serves as an efficient mirror condenser system

Product data

- General Characteristics

Philips Code	14527
ANSI Code	EJA
LIF Code	-
Cap-Base	GX5.3
Bulb	R50
Bulb Material	Quartz-UV Open
Reflector Finish	Coated Specular Dichroic
Filament Shape	-
Burning Position	s90
Main Application	Projection
Life to 50% failures	20 hr

- Light Technical Characteristics

Colour Rendering Index	100 Ra8
Colour Temperature Technical	3400 K

- Electrical Characteristics

Rated Lamp Wattage	150 W
Voltage	21 V
Dimmable	yes

- Luminaire Design Requirements

Pinch Temperature	400 (max) C
Bulb Temperature	900 (max) C
Working Distance WD	28 mm

- Product Dimensions

Overall Length C	44.5 (max) mm
Diameter D	50.7 (max) mm
Filament Dimensions (WxH) [mm]	-


- Product Data


Order code	412560 30
Full product code	871150041256030
Full product name	14527 150W GX5.3 21V 1CT
Order product name	14527 150W GX5.3 21V 1CT
Pieces per pack	1
Packing configuration	24
Packs per outerbox	24
Bar code on pack - EAN1	8711500412560
Bar code on outerbox - EAN3	8711500425751
Logistic code(s) - 12NC	924041119894
Net weight per piece	0.024 kg

PHILIPS

Halogen reflector

Dimensional drawing

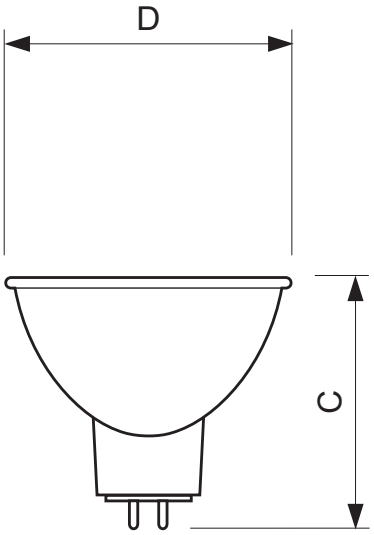



GX5.3

14527 150W GX5.3 21V 1CT

Product	C (Max)	D (Max)	L (Min)	L (Norm)	L (Max)
14527 150W GX5.3 21V	44.5	50.7	-	-	-

© 2014 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2014, February 12
data subject to change